

# IN05 & IN05-A

## Fingerprint Recognition TA & Access Terminal



IN05 is a fingerprint identification time & attendance and access control terminal, which can connect with third party electric lock, door sensor and exit button etc.

Communicating via Wi-Fi, TCP/IP, 3G/4G and USB host, it ensures a smooth connection and data transfer.

It's associated with ZK new fingerprint reader, the operation remains stable under strong light source and high preciseness of verification of wet and rough fingers. Amazing verification speed and intuitive Operation process make it popular. It will match your slap-up office perfectly.

### Features



Build in PoE



1 channel auxiliary input for smoke detector connection



Build in battery, up to 4 hours



Multiple communicate mode, Wi-Fi, TCP/IP, 3G/4G, USB host



Stable operation under strong light source




Advance access function including Lock connection, alarm, Wiegand input/output


# Specifications

<b>Product</b>		IN05	IN05-A
<b>Main</b>	Biometric	Fingerprint	
	RF Optional	125kHz EM / 13.56MHz IC	
<b>Capacity</b>	Max User(1:N)	10,000	
	Max Fingerprint (1:N)	3,000 standard / 10,000 Optional	
	Max Record	100,000	
<b>Interface</b>	TCP/IP	10/100 M	
	PoE Optional	802.3 at 28W	
	Wi-Fi	802.11 B/G/N	
	3G Optional	WCDMA	
	4G Optional	N/A	Supported
	USB	USB 2.0 (Host)	
	RS232	1 port for external printer	
	RS485		1 port for FP reader
	Relay	-	2 relays
	Wiegand		1ch In & Out
<b>Hardware</b>	Input		1 Input
	LCD	3.0" Color LCD	
	Sound	24-bit	
	Operating Temp.	0 °C - 45 °C	
	Operating Humidity	20% ~ 80%	
	Power	DC 12V 1.5A	DC 12V 3A
	Dimensions(W x H x D mm)	213*155*107.81mm	
Certificates	CE, FCC, RoHS		
<b>Function</b>	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, Lock, sensor, Exit button	
	Optiona	ID/IC/HID Card, ADMS, POE	
<b>Compatibility</b>		ZKTime.net 3.0, BioTime 8.0	

## Configuration

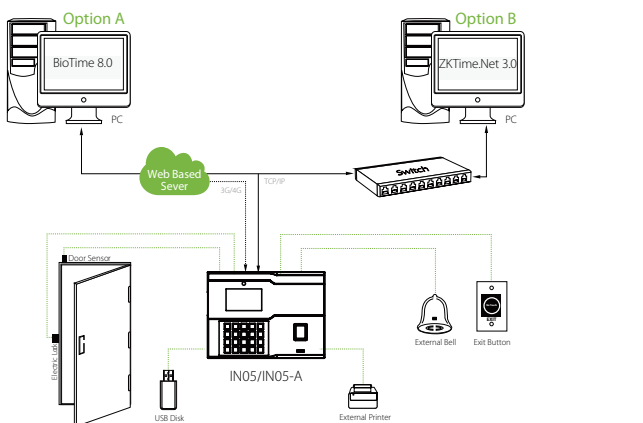

## Dimensions (mm)

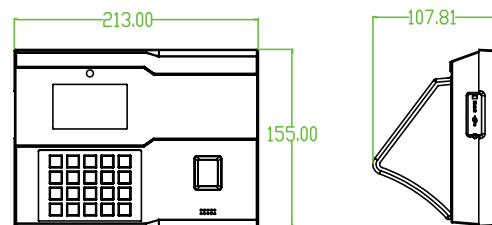

V2.0 2021.07.14